

KING KOMBO[®] 2.0 XT

COMBINATION LADDER | TYPE IAA 375 LBS | OSHA + ANSI COMPLIANT

3-IN-1 LADDER A-FRAME - EXTENSION - LEANING

1. ONE-HANDED GRIP-N-GO[™] HINGE

Transition between stepladder, extension and leaning configurations at the press of a single button.

2. ROTATING WALL PAD

Get closer to your work with the rotating wall pad. In the leaning position, it conforms to inside and outside corners, walls and studs.

3. NON-CONDUCTIVE, HI-VIZ GREEN FIBERGLASS

Increases ladder visibility. Usable on job sites that require fiberglass ladders.

4. V-BAR


Lean the extension side of the ladder on outside corners, walls, studs and poles with the non-marring V-Bar.

5. EXTENDABLE REAR SECTION

Three feet of added extension with parallel rails means you never have to hope your ladder fits in ceiling access ports. It just does.

6. GROUND CUE[®]

Makes an audible click when you've reached the final step of your descent.

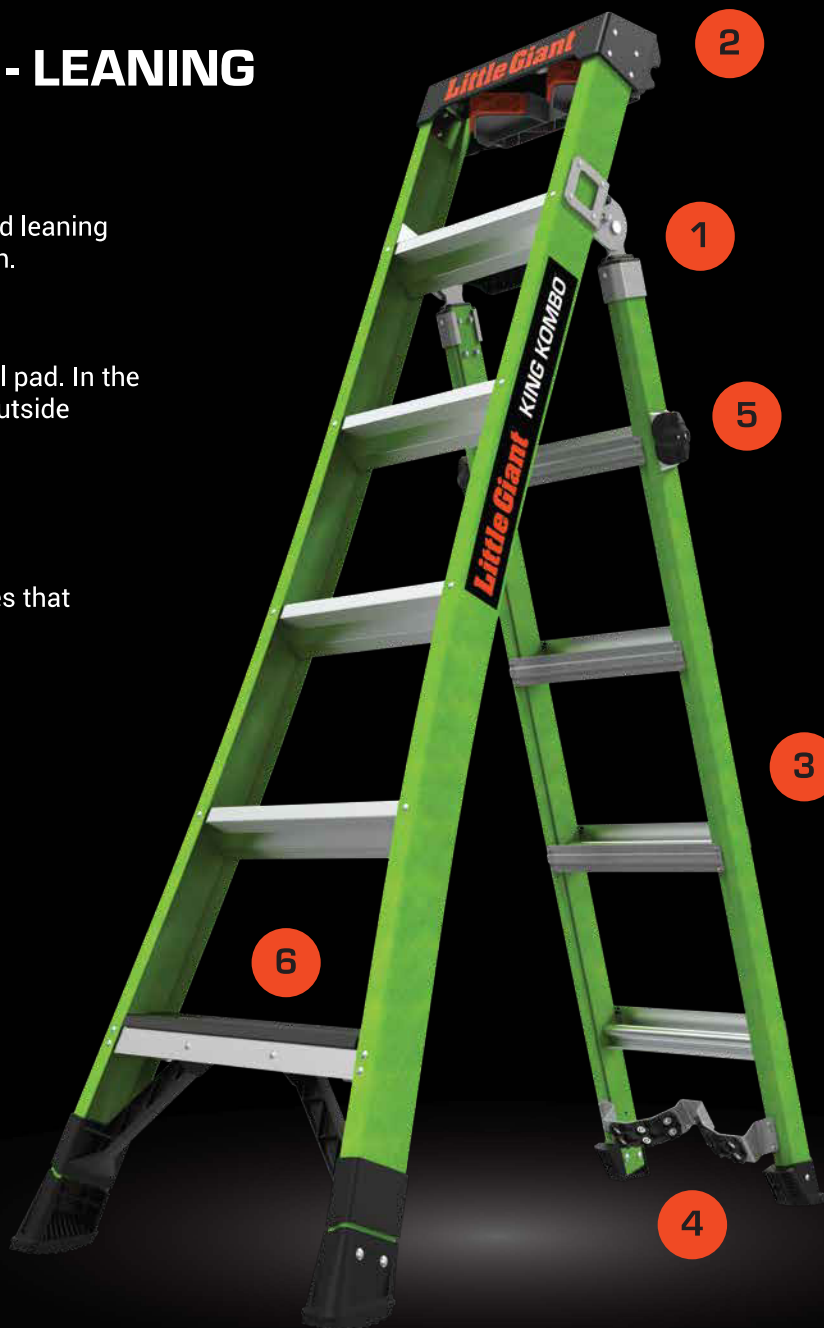

NON-CONDUCTIVE FIBERGLASS

FIBRA DE VIDRIO NO CONDUCTORA



Inside Corner Rotating Wall Pad



Extended Rear Section for Work on Stairs



V-Bar on Outside Corner



Outside Corner Rotating Wall Pad



Narrow Access Points



Flat Wall Rotating Wall Pad



One-Handed Grip-N-Go Hinge

PRODUCT DESCRIPTION

We call it the King for a reason. This 3-in-1 combination ladder isn't just innovative, it's the most awarded ladder in history. And now, it's got another three feet of ladder. The King Kombo 2.0 XT features an extendable rear section for work on stairs and even more height in the extension position.

Model	Weight capacity ¹	A-frame max standing height ²	Extension max standing height ²	Storage height ²	Storage depth ²	Storage width at base ²	Max footprint ²	Ladder weight
King Kombo 6-10' Industrial (13610-071)	170kg	1.14m (3' 9")	2m (6'7")	1.86m (6'1")	17.8cm (7")	64cm (2'1")	112cm (3'8")	10.9kg
King Kombo 8-14' Industrial (13814-071)	170kg	1.72m (5' 8")	3.24m (10'8")	2.47m (8'1")	17.8cm (7")	72cm (2'4")	150cm (4'11")	14.1kg